

MOWREY

E L E V A T O R

Tuesday, March 22, 2022

Quote # 10-13092

**RE: HAMMOND HOUSE
ATLANTA, GA**

To Whom It May Concern:

We are pleased to quote the amount of **\$32,750.00** for the installation of **one V-1504 vertical platform lift by Savaria.**

| | | | |
|------------|-----------|------------------------|-----------------|
| Rated Load | 750 lbs. | Maximum lifting height | 48" |
| Cab size | 36" x 54" | Landings | 1 front/1 rear |
| Travel | 44" | Doors | Automatic swing |

Notes: **Power to the unit, any concrete work, and demo of the existing unit is by other.**

Please see the attached drawings.

Prevailing wage is not included unless otherwise stated on bid letter.

This quote is good for 60 days.

Bond, if required, add 3.5%.

Mowrey will not comply with Covid vaccine mandates.

Payment Terms:

50% Deposit

25% Upon delivery

25% Upon completion

Thank you for your consideration. Please do not hesitate to contact this office if you should have any questions.

Sincerely,

Grace Bush


Grace Bush, Construction Sales Manager
Mowrey Elevator Company of Florida, Inc.
800-441-4449, Ext. 136
grace@mowreyelevator.com

WWW.MOWREYELEVATOR.COM




ENCLOSURE DOOR WIDTH DOESN'T ALWAYS MATCH INSIDE PLATFORM DIMENSION.
 IF THERE ARE CONCERNS ABOUT THE DOOR SWING CONFLICTING WITH AN
 OBSTRUCTION, PLEASE REQUEST FURTHER DETAIL.

TYPICAL PLAN

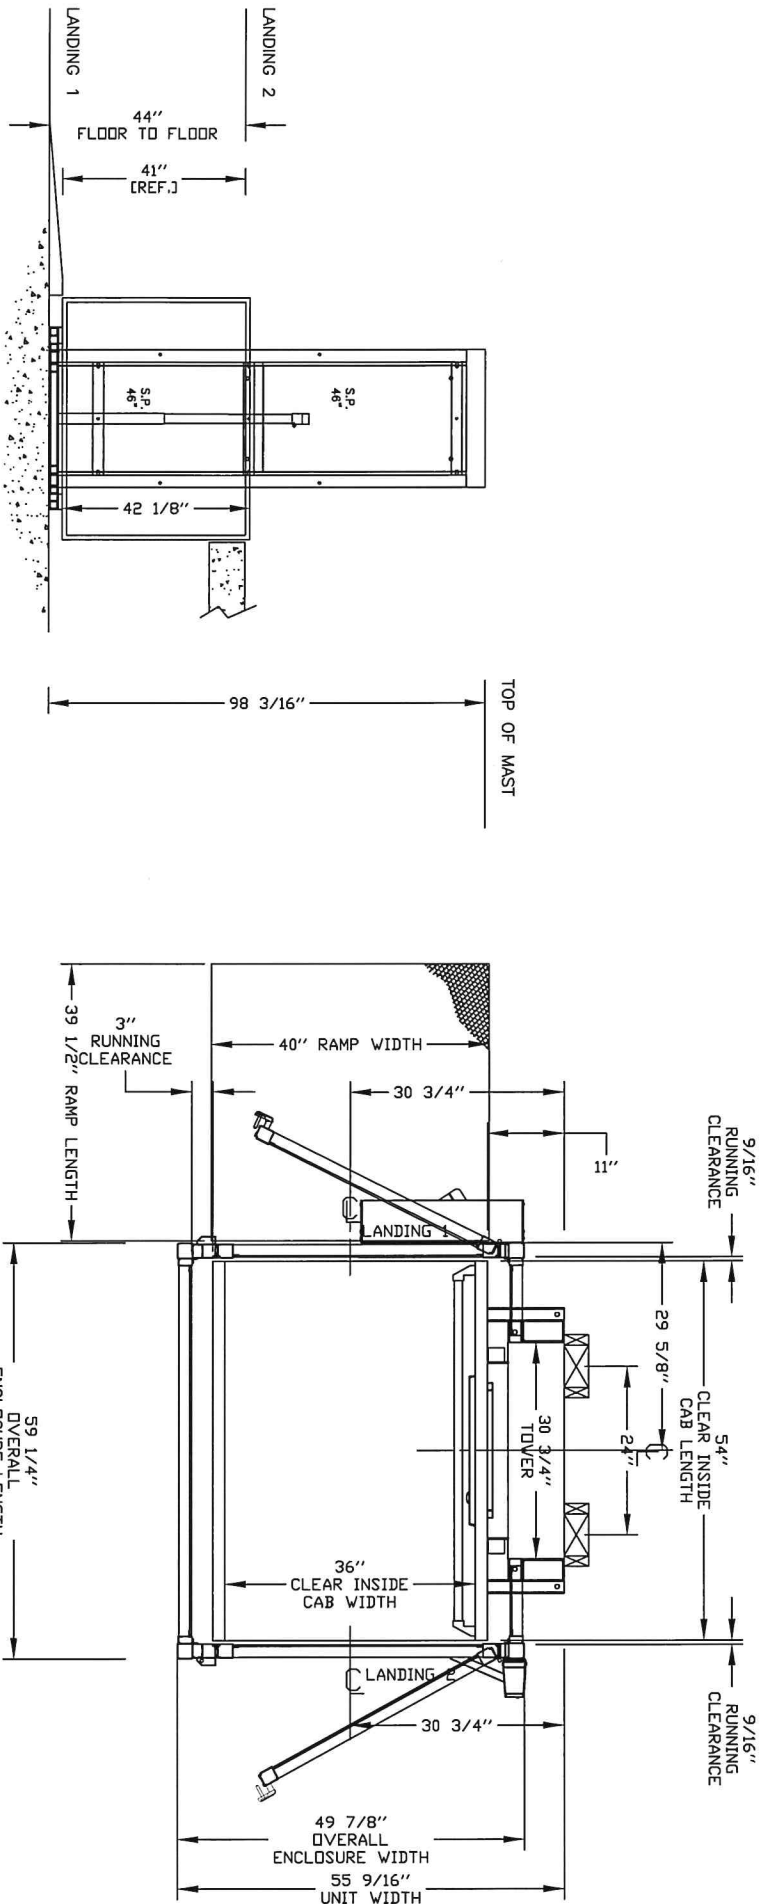

TOWER DETAIL

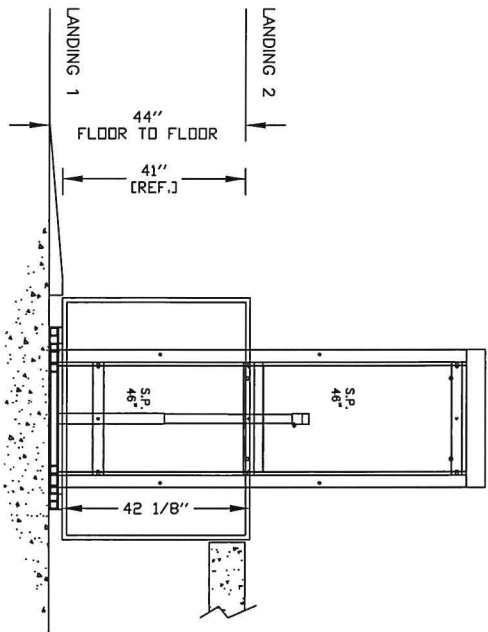

PRELIMINARY DRAWING ONLY
 DRAWING APPROVAL:

- THIS DRAWING REFLECTS OUR INTERPRETATION OF THE INFORMATION PROVIDED BY THE
 OWNER ON THE ORDER FORM. THIS INFORMATION IS THE DEALER'S RESPONSIBILITY, AND IS
 THE BASIS FROM WHICH THIS LIFT IS DESIGNED AND MANUFACTURED. PLEASE INDICATE THE
 REQUESTED ACTION BY CHECKING ONE OF THE FOLLOWING BOXES AND SIGNING BELOW TO
 AUTHORIZE COMPLETION OF THIS ORDER.
- APPROVED WITH NO EXCEPTIONS
 - APPROVED WITH EXCEPTIONS
 - APPROVED WITH EXCEPTIONS, NO REAPPROVAL REQUIRED
 - MAKE CHANGES AS NOTED, NO REAPPROVAL DRAWING REQUIRED
 - CHANGE AS NOTED, REAPPROVAL REQUIRED
 - MAKE CHANGES AS NOTED, SEND CORRECTED DRAWING FOR REAPPROVAL BEFORE MANUFACTURE

CHANGES REQUEST:


- 1
- 2
- 3
- 4

SIGNATURE: _____ DATE: _____
 INITIALS: _____

OFFICE USE ONLY:
 OPERATOR DESIGN SIGN: 0.0
 MODEL VERSION SIGN: H-1A1

DATE: 08/16/19


CUSTOMER: MOWREY ELEVATOR CO. OF FLORIDA
 PROJECT: HAMMOND HOUSE
 ADDRESS: STREET, CITY, GEORGIA, USA



Part No. V-1504 ENCLOSURE
 Model No. 165098

REGION CODE: 03727222
 ORDERED BY: [Signature]
 QUANTITY: 1

SAVATICA
 SHEET NO. P000001 OF 1



GENERAL ARRANGEMENT
 ENCLOSED VERTICAL WHEELCHAIR PLATFORM LIFT

PROVISIONS BY OTHERS

SPECIFICATIONS

GENERAL

HOISTWAY - THE HOISTWAY MUST BE DESIGNED AND BUILT IN ACCORDANCE WITH "SAFETY STANDARD FOR PLATFORM LIFTS AND STAIRWAY CHAIRLIFTS" OR "SAFETY CODE FOR ELEVATORS AND ESCALATORS" AND ALL STATE AND LOCAL CODES.

PLUMB RUNWAY - DUE TO CLOSE RUNNING CLEARANCES OWNER/AGENT MUST ENSURE THAT HOISTWAY AND PIT (WHERE PROVIDED) ARE LEVEL, PLUMB (-/+ 1/8" (3 mm)) AND SQUARE AND ARE IN ACCORDANCE WITH THE DIMENSIONS ON THESE DRAWINGS.

MINIMUM OVERHEAD CLEARANCE- OWNER/AGENT MUST ENSURE MINIMUM OVERHEAD CLEARANCE IS IN COMPLIANCE WITH CODES.


CONSTRUCTION SITE- OWNER/AGENT TO PROVIDE ALL MASONRY, CARPENTRY AND DRYWALL WORK AS REQUIRED AND SHALL PATCH AND MAKE GOOD (INCLUDING FINISH PAINTING) ALL AREAS WHERE WALLS/FLOORS MAY REQUIRE TO BE CUT, DRILLED OR ALTERED IN ANY WAY TO PERMIT THE PROPER INSTALLATION OF THE LIFT.

STRUCTURAL

FLOOR/SUPPORT WALL LOADS- CONTRACTOR TO ASSURE THAT BUILDING AND SHAFT WILL SAFELY SUPPORT ALL LOADS IMPOSED BY THE LIFT EQUIPMENT. REFER TO THE LOAD DIAGRAM ON THIS DRAWING.

MAST TO BE SECURELY FASTENED- WHERE REQUIRED THE MAST MUST BE SECURELY FASTENED TO THE STRUCTURAL SUPPORT WALL. REFER TO WALL / FLOOR SUPPORT LOAD DIAGRAM AND WALL LAG DIMENSIONS ON THIS DRAWING.

WHERE DOORS ARE REQUIRED- SUITABLE LINTELS MUST BE PROVIDED BY OWNER/AGENT. DOOR FRAMES ARE NOT DESIGNED TO SUPPORT OVERHEAD WALL LOADS.

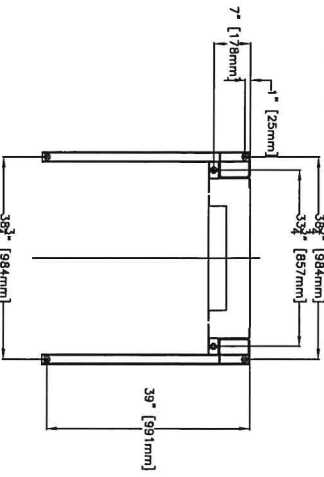

LOADS CALCULATED ON BASED ON ANCHOR POINTS EVERY 48" EVERY TOWER SECTION NEEDS TO BE ANCHORED. IF INCREASE ACCORDINGLY.

ELECTRICAL

GENERAL- ELECTRICAL EQUIPMENT AND WIRING TO COMPLY WITH SECTION 38 OF CSA C22.1 (CANADA) OR SECTION 620 OF NEC ANSI/NFPA 70 (USA).

POWER SUPPLY- 120VAC, 20A, 60HZ, 1PH CIRCUIT THROUGH A FUSE DISCONNECT WITH AUXILIARY CONTACT ON MAIN POWER SUPPLY. PROVIDE TWO 18 AWG CONDUCTORS BETWEEN CONTACT AND CONTROLLER.

LIGHTING- LIGHTING OF 100 LX MIN. AT PLATFORM AND LANDINGS. LIGHTING WITH SWITCH AND ELECTRICAL GFCI OUTLET IN HOISTWAY PIT.

PHONE- IF A TELEPHONE CIRCUIT IS REQUIRED, JACK OR PHONE ARE PROVIDED ON THE CAR. A DEDICATED ANALOG PHONE LINE (NO VOIP) IS REQUIRED TO BE PROVIDED BY OTHERS TO THE CONTROLLER FOR VOIP. PLEASE CONTACT SAVARIA. SAVARIA LINK REMOTE MONITORING - NOT APPLICABLE Not required



ENTRANCES

UPPER LANDING GATES- WHERE REQUIRED, SMOOTH SOLID BARRIERS ARE TO BE SUPPLIED AND INSTALLED ON BOTH SIDES OF ENTRANCE AT UPPER LEVEL AND MUST BE A MINIMUM OF 42" (1067 mm) HIGH. ENTRANCE ASSEMBLY MUST BE IN PLACE PRIOR TO THIS PROVISION. FASCIA PANEL BELOW UPPER LEVEL ENTRANCE- WHERE REQUIRED, FASCIA PANEL MUST BE FASTENED TO A SOLID WALL AND BE PERPENDICULAR TO THE FLOOR AND WALLS. HOISTWAY FASCIA IS NOT SELF-SUPPORTING FOR LONG, CONTINUOUS RUNS VOID OF ENTRANCES. ADEQUATE SUPPORT FOR THE FASCIA MUST BE PROVIDED.

ENTRANCE ASSEMBLY- ENTRANCE ASSEMBLIES MUST BE ADJUSTED TO ALIGN WITH PLATFORM AND INTERLOCK EQUIPMENT. OTHERS TO ALLOW AN ADEQUATE ROUGH OPENING.

RETURN WALLS- RETURN WALLS AT ENTRANCES MUST BE BUILT-IN BY OTHERS AFTER ENTRANCE ASSEMBLIES ARE IN PLACE. ENTRANCE ASSEMBLY MUST BE SECURELY FASTENED TO WALLS.

ENTRANCE LOCATIONS

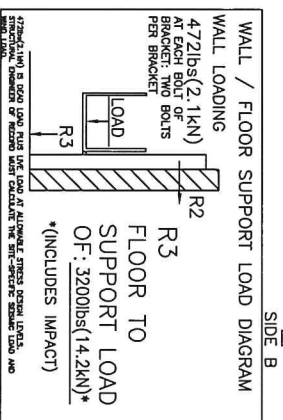

GENERAL

CLASSIFICATION- Enclosed Vertical Wheelchair Platform Lift
APPLIED CODE- ASME A18.1-2008 Section 2 Rule
SPECIAL NOTE- V-1504 Enclosure
CAPACITY- 750 lbs (341 kg)
NOMINAL SPEED- 20 fpm (0.102 m/s)
TRAVEL- 41" (1041 mm)
PIT DEPTH- 0" (0 mm)
PLATFORM SIZE- 36" X 54" (914 mm X 1372 mm)
POWER SUPPLY- 24dc/20ac/20A/60Hz SINGLE PHASE
BATTERY BACK UP- up and down direction

JACK UNIT

STROKE- 24" (610 mm)
PLUNGER O/D- 1.5" (38 mm)
CYL. O/D- 2.125" (54 mm)
CYL. I/D- 1.75" (44 mm)

CONTROLLER

MODEL- V-1504
TYPE- GPFS
QPS #- LRI390-7R2
AMP- 100 A
MFR.- SAVARIA

LANDING 1 Door
LANDING 2 Gate
LANDING 3
LANDING 4

DOORS / GATES / CALL STATIONS

| DOOR TYPE | ENTRANCE SIDE | DOOR SWING | DOOR INSERT | LOCK TYPE | AUTO DOOR OPENER | CUSTOM DOOR WIDTH | IN FRAME CALL STN. | CALL STN. TYPE | CALL STN. KEYPAD | CALL STN. STOP BUTTON | CALL STN. MOUNTING | INSULATED PROODOOR KIT |
|-----------|---------------|------------|------------------|------------------|---------------------|-------------------|--------------------|--------------------------------------|------------------|-------------------------|--------------------|------------------------|
| d | c | h | Clear Plexiglass | WR500 Lock (24V) | Commander Auto Oper | no | no | Call/Send Buttons Off Pos. Removable | no | Surface Mounted Remable | No | No |
| h | h | h | Clear Plexiglass | WR500 Lock (24V) | Gatekeeper | no | no | Call/Send Buttons Off Pos. Removable | no | Surface Mounted Remable | No | No |

OPTIONS PROVIDED

EMERGENCY PENDENT PLUG IN MANUAL LOWERING BOX
WINGS- no
TOUCH UP PAINT- 1 con(s)
BUILDING- Public Building
LIGHT CURTAIN- no
PHONE OR PHONE PLUG- Hands free phone
FLOOD SWITCH- no
REMOTE MACHINE ROOM- Not required
LOCATION- OUTDOOR

OFFICE USE ONLY
OPERATION VERSION STYLE- 0.0
MODEL VERSION STYLE- E-111E

CUSTOMER- MOWREY ELEVATOR CO. OF FLORIDA
PROJECT- HAMMOND HOUSE
ADDRESS- 100 Street, City, Georgia, USA

DATA SHEET


ENCLOSED VERTICAL WHEELCHAIR PLATFORM LIFT

POWER UNIT

MOTOR- 3.0 HP, 24V DC
FLOW- 1.15 Gal/min (4.35l/min)
CAB FINISH- STEEL W/PAINT

HYDRAULIC DATA

OIL TYPE- UNIVIS 32 INDOOR
GALLONS REQ'D- DEKRON ATF OUTDOOR
MAXIMUM WORKING PRESSURE- 1.0 Gdi (3.79 L)
RELIEF PRESSURE- 2500 psi (17.2 MPa)
MAXIMUM RELIEF PRESSURE- WFX125% MAX.
HYDRAULIC HOSE- 2500 psi (17.2 MPa)
BURSTS- 1/4" (6.4 mm) ID
FITTINGS- 20000 psi (137.9 MPa)
SUSPENSION CHAIN- 1/4" (6.4 mm) NPT WALE
2X #50 ROLLER CHAIN- 7171 lbs (31.9 kN) each
BREAKING STRENGTH- TYPE 'A'
SAFETY BRAKE-




DATE: 08/16/19
 REVISION DATE: 03/27/22
 DRAWING NO: P00000
 SHEET NO: 2 OF



Part No. V-1504 ENCLOSURE
 Variant No. 1 65098

PANEL DRAWING

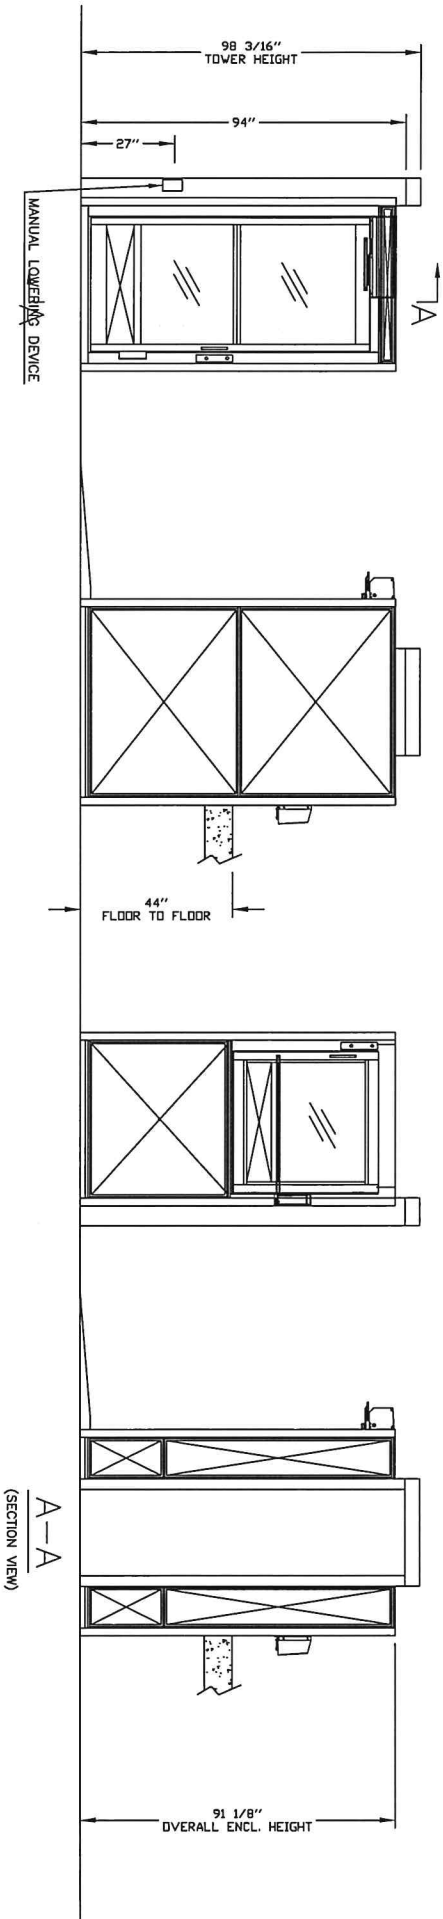

INSERT STYLE: DOOR & GATE
 SHEET METAL
 CLEAR PLEXIGLASS

INSERT STYLE: Enclosure
 SHEET METAL
 GLASS


ELEVATION VIEWS
 ENCLOSED VERTICAL WHEELCHAIR PLATFORM LIFT

CUSTOMER: MOWREY ELEVATOR CO. OF FLORIDA
 PROJECT: HAMMOND HOUSE
 ADDRESS: 201 S. Street, City, Georgia, USA


OFFICE USE ONLY:
 CORRELATION REVISION NUMBER: 0.0
 MODEL REVISION NUMBER: 8-1-15

Part No. V-1504 ENCLOSURE
 Variant No. 1 65098

DATE: 08/16/19
 REVISION DATE: 03/22/22
 COMPARED BY: [Signature]
 savaria
 P00000
 SHEET NO. 3 OF 4

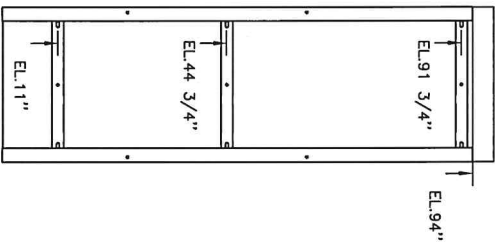

EL: MOUNTING BRACKET POSITION

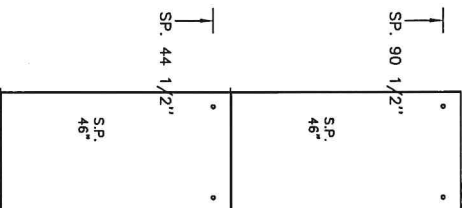

SP: SERVICE PANEL

LOADS CALCULATED ON BASED ON ANCHOR POINTS EVERY 48"
 EVERY TOWER SECTION NEEDS TO BE ANCHORED. IF SPACING
 IS INCREASED, LOADS PER BRACKETS WILL INCREASE ACCORDINGLY

ELEVATION VIEWS
 ENCLOSED VERTICAL WHEELCHAIR PLATFORM LIFT

| | | |
|---|--|-------------------------------------|
| CUSTOMER: MORREY ELEVATOR CO. OF FLORIDA | DATE: 08/16/19 | Part No. V-1504 ENCLOSURE |
| PROJECT: HAMMOND HOUSE | REVISION: 0.0 | Variant No. 165098 |
| ADDRESS: N O Street, City GEORGIA, USA | OFFICE USE ONLY: OPERATION (OPTIONAL) 0.0 MODEL VERSION (S/N) 85418 | SAVARTIA |
| DATE: 03/27/22 | DATE: 03/27/22 | Part No. P00000 |
| DATE: 03/27/22 | DATE: 03/27/22 | SHEET No. 4 OF |